



RECORDS CENTER ACCESSORY CATALOG







RECORDS CENTER ACCESSORIES

Table of Contents

HANDLING EQUIPMENT

Rolling Ladder Carts

Aluminum

Rolling Ladder Cart 3 Step	3
Rolling Ladder Cart 4 Step	3
Rolling Ladder Cart 5 Step	4
Rolling Ladder Cart 7 Step	4
Rolling Ladder Cart 8 Step	5
Rolling Ladder Cart 9 Step	5
Rolling Ladder Cart 5 Step Medical	6
Foot Pads	6

Steel

Rolling Ladder Cart 3 Step	7
Rolling Ladder Cart 4 Step	7

Power Lifts

Power Lifts / Pickers	8
-----------------------	---

Ladders

Track Ladders	9
---------------	---

Trucks & Carts

Pallet Trucks	10
Platform Trucks	11
Hand Trucks	12-13
Foam Tires	13
Service Carts	14
Medical Stock Truck	15
Shelf Dividers	15

FACILITY EQUIPMENT

Facility Equipment

Strapping Machine	16
Work Stations	16-17
Weighing Scales	18
Lockers	19
Fans	20
Portable Tier Racks	21
Spiral Chutes	21
Wire Mesh Enclosure	22
Stock Room Shelving	22

Safety Equipment

Protective Railing	23
Column Protector	23
Safety Nets	24
Security Gate	24

Dock Equipment

Dockboards	25
Dock Plates	25
Wheel Risers	26
Rubber Wheel Chock	26

Conveyors

Flex Gravity Roller	27
Flex Gravity Skate	27
Vertical Reciprocating	28

NOTES

HANDLING EQUIPMENT

ROLLING LADDER CARTS

ROLLING LADDER CART 3-STEP RL3-AI

■ DESCRIPTION

Standard Lower Deck Stock Picker with wide, non-sanded step surfaces

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock in out of reach areas. Allows user an average maximum eye level of 90".

■ SPECIFICATIONS

Dimensions are:
20"W x 45"L x 38"H, with ladder height of 50", top step at 30". Unit has load capacity of 500 lbs. Satin finish aluminum, 1/8" sheet and 3/4" IPS pipe. Casters are 5" with ball-bearings, non-marking tires and corner mounted swivels on ladder end.

■ SHIP WEIGHT

56 lbs.



ROLLING LADDER CART 4-STEP RL4-AI

■ DESCRIPTION

Standard 2 Shelf Stock Picker with wide, non-sanded step surfaces

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock in out of reach areas. Allows user an average maximum eye level of 100".

■ SPECIFICATIONS

Dimensions are:
20"W x 45"L x 31"H, with ladder height of 71½", top step at 40". Unit has load capacity of 500 lbs. Satin finish aluminum, 1/8" sheet and 1/4" IPS pipe. Casters are 5" with ball-bearings, non-marking tires and corner mounted swivels on ladder end.

■ SHIP WEIGHT

77 lbs.



HANDLING EQUIPMENT

ROLLING LADDER CARTS

ROLLING LADDER CART 5-STEP RL5-AI

■ DESCRIPTION

Standard Hi-Shelf Stock Picker with wide top step, non-sanded step surfaces

■ USE

Provides a stable, maneuverable work platform for picking stock in out of reach areas, on or off catwalks. Allows user an average maximum eye level of 110".

■ SPECIFICATIONS

Dimensions are: 21½"W x 50"L x 66"H, top step is at 50". Unit has load capacity of 500 lbs. Satin finish aluminum 1/8" sheet and 3/4" IPS pipe. Casters are 5" with roller-bearings, non-marking tires and corner mounted swivels on ladder end.

■ SHIP WEIGHT

95 lbs.



ROLLING LADDER CART 7-STEP RL7-AI

■ DESCRIPTION

Standard Hi-Shelf Stock Picker with wide top step, non-sanded step surfaces

■ USE

Provides a stable, maneuverable work platform for picking stock, on or off catwalks. Allows user an average maximum eye level of 130".

■ SPECIFICATIONS

Dimensions are: 24"W x 50"L x 85"H, top step is at 70". Unit has load capacity of 500 lbs. Satin finish aluminum, 1/8" sheet and 3/4" IPS pipe. Casters are 5" with roller-bearings, non-marking tires and corner mounted swivels on ladder end.



RL7-AI-N

Also available in a narrow size of 20"W x 50"L x 85"H

■ SHIP WEIGHT

122 lbs. – Standard

114 lbs. – Narrow

HANDLING EQUIPMENT

ROLLING LADDER CARTS

ROLLING LADDER CART 8-STEP RL8-AI

■ DESCRIPTION

Standard Hi-Shelf Stock Picker with wide top step, sand-coated step surfaces and safety step lock

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock, on or off catwalks. Allows user an average maximum eye level of 140" and a reach of over 11 feet.

■ SPECIFICATIONS

Dimensions are: 24"W x 50"L x 66"H with ladder height at 105"H, top step at 80". Unit has load capacity of 500 lbs. and counter weights. Satin finish aluminum, 1/8" sheet and 3/4" IPS pipe. Casters are 5" with roller-bearings, non-marking tires and corner mounted swivels on ladder end.

■ SHIP WEIGHT

172 lbs.



ROLLING LADDER CART 9-STEP RL9-AI

■ DESCRIPTION

Hi-Ladder cart with wide top step, sand-coated step surfaces and safety step lock

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock. Allows user an average maximum eye level of 160" and a reach of over 15 feet. Not for catwalks.

■ SPECIFICATIONS

Dimensions are: 28 1/4"W x 46 1/4"L x 103"H with ladder height at 136 1/2"H, top step is at 99 1/2". Unit has load capacity of 500 lbs., ballast tank for stability. Satin finish aluminum, 1/8" sheet and 3/4" IPS pipe. Casters are 5" with ball-bearings, non-marking tires, corner mounted swivels on ladder end.

■ SHIP WEIGHT

149 lbs.



HANDLING EQUIPMENT

ROLLING LADDER CARTS

ROLLING LADDER CART 5-Step Medical RML5-AI

■ DESCRIPTION

Hi-Shelf medical and X-ray Stock Picker with 9" high dividers on top, middle, and bottom shelves to hold medical files and/or X-rays with less slipping

■ USE

Provides a stable, maneuverable work platform for picking X-ray or medical file stock in out of reach areas, on or off catwalks. Allows user an average maximum eye level of 110".

■ SPECIFICATIONS

Dimensions are: 21½"W x 50"L x 71"H top step is at 50". Unit has load capacity of 500 lbs. Dividers are 9" high, satin finish aluminum 1/8" sheet and 3/4" IPS pipe. Casters are 5" with roller-bearings, non-marking tires and corner mounted swivels on ladder end.

■ SHIP WEIGHT

110 lbs.



FOOT PADS FPRL

■ DESCRIPTION

Foot Pads for Rolling Ladders

■ USE

Replace worn out or damaged Foot Pads on existing Rolling Ladders.

■ SPECIFICATIONS

Dimensions are: Bottom Rubber pad 2" x 2;" 2 ¼" High. Sold in Pairs

■ SHIP WEIGHT

8 oz.



HANDLING EQUIPMENT

ROLLING LADDER CARTS

ROLLING LADDER CART 3-STEP RL3-SS

■ DESCRIPTION

Standard 3 Shelf Steel Stock Picker with safety ladder attached

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock in out of reach areas.

■ SPECIFICATIONS

Dimensions are:

20"W x 45"D x 50"H with a ladder height at 48". Unit has load capacity of 1,200 lbs. Gray powder finish, all shelves are 14 gauge steel with an 1½" lip. 2" x 1/8" angle iron uprights. Casters are 5" bolt-on, polyurethane, (2) Swivel (2) Rigid. Spring loaded ladder grips when stepped on, rubber tips prevent marking floors.

■ SHIP WEIGHT

150 lbs.



ROLLING LADDER CART 4-STEP RL4-SS

■ DESCRIPTION

Standard 3 Shelf Steel Stock Picker with safety ladder attached

■ USE

Provides a stable, maneuverable work platform for picking or replacing stock in out of reach areas.

■ SPECIFICATIONS

Dimensions are: 20"W x 45"D x 50"H with a ladder height at 78". Unit has load capacity of 1,200 lbs. Gray powder finish, all shelves are 14 gauge steel with an 1½" lip. 2" x 1/8" angle iron uprights. Casters are 5" bolt-on, polyurethane, (2) Swivel (2) Rigid. Spring loaded ladder grips when stepped on, rubber tips prevent marking floors.

■ SHIP WEIGHT

169 lbs.



HANDLING EQUIPMENT

POWER LIFTS

POWER LIFTS / PICKERS

SSV10 :: Platform Height 10ft

15DVL :: Platform Height 15ft 3in.

20DVL :: Platform Height 19ft 5in.

■ **DESCRIPTION**

Driveable, Fully Powered Lift/Stock Picker

■ **USE**

Provides access to frequently required elevated areas for optimum stock picking productivity. ZERO turning radius allows efficient operation in narrow aisles and tight spaces, even while extended at full heights ranging from 10' to 20'. (depending on model)

■ **SPECIFICATIONS**

Varies depending on model, please call for details.



HANDLING EQUIPMENT

LADDERS

TRACK LADDERS

TL-ST :: Single Track

TL-DT :: Dual Track


■ DESCRIPTION

Ladder rolls from side to side across the aisle on a track mounted on the carriage.

Provides safe, convenient access to tall shelves on both sides of narrow aisles. Saves time by making it easier to store and retrieve items from inventory.

■ SPECIFICATIONS

Dimensions vary depending on system.
Please call.

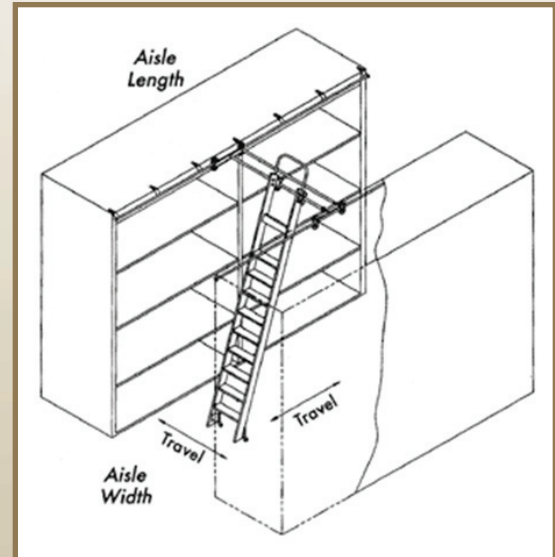

HANDLING EQUIPMENT

TRUCKS & CARTS

PALLET TRUCK FHHLT-167

- **DESCRIPTION**
Fully Hydraulic Hand Lift Truck
- **USE**
Transport pallets throughout
Records center with ease.
- **SPECIFICATIONS**
Dimensions are:
Frame width: 27"
Fork length: 48"
Fork width: 7"
3" lowered height
7.75" raised height
5,500 lbs. capacity
- **SHIP WEIGHT**
167 lbs.



ELECTRIC PALLET TRUCK PPT-885

- **DESCRIPTION**
Electric Powered Pallet Truck
- **USE**
For easy turning in crowded aisles or tight trailers,
provides a 360° turning radius.
- **SPECIFICATIONS**
Fork width: 7"
Frame width: 27"
Fork length: 48"
3.25" lowered height
9.3" raised height
5,500 lbs. capacity
24 volt transistorized
drive control system.
Maintenance free battery packs.
Built in 110 volt battery charger.
Travel speed (MPH): 4.1 empty
2.7 loaded
- **SHIP WEIGHT**
885 lbs. (with batteries)



HANDLING EQUIPMENT

TRUCKS & CARTS

PLATFORM TRUCKS

PT-2448, 2460, 2436, 1836, 1848

■ **DESCRIPTION**

Smooth Deck Platform Truck

■ **USE**

Transportation of boxes throughout records center, on or off catwalks.

■ **SPECIFICATIONS**

Dimensions are:

PT-2448 24"W x 48"L

PT-2460 24"W x 60"L

PT-2436 24"W x 36"L

PT-1836 18"W x 36"L

PT-1848 18"W x 48"L

Unit has load capacity of 2000 lbs.

Made of light weight aluminum, reinforced underside for strength. Unit has load capacity of 2,000 lbs., Casters are 6" non-marking (2) Swivel (2) Rigid.

* Also available with Treadplate Deck (additional charges applies).



HIGH-END PLATFORM TRUCKS

HE1648, 1660, 2448, 2460

■ **DESCRIPTION**

High End Platform Truck

■ **USE**

Transportation of multiple stacked boxes throughout records center.

■ **SPECIFICATIONS**

Dimensions are:

HE1648 16"W x 48"L x 61"H

HE1660 16"W x 60"L x 61"H

HE2448 24"W x 48"L x 61"H

HE2460 24"W x 60"L x 61"H

14 gauge all steel construction, 1" pipe end racks which are removable and stand 61"H. Unit has load capacity of 1,500 lbs. Gray powder coat finish. Tight turning radius with 4" x 1 1/4" swivel casters on ends and 8" x 2" mold on rigid center casters.



HANDLING EQUIPMENT

TRUCKS & CARTS



GEMINI® Sr. HAND TRUCK HT-Sr

■ **DESCRIPTION**

Gemini Sr. Convertible Hand Truck

■ **USE**

General purpose 2 wheel hand truck converts to 4 wheel platform truck in seconds, to use throughout records center.

■ **SPECIFICATIONS**

Dimensions are:

21"W x 61"H, Unit has load capacity of 500 lbs. as hand truck and 1,000 lbs. as platform truck, high strength, light weight aluminum. Nose is Die-cast magnesium 18" wide, 7½" deep. 10" pneumatic tires, 5" x 1 ½" casters. All parts are replaceable. * Additional accessories available.

■ **SHIP WEIGHT**

50 lbs.



GEMINI® Jr. HAND TRUCK HT-Jr

■ **DESCRIPTION**

Gemini Jr. Convertible Hand Truck

■ **USE**

General purpose 2 wheel hand truck converts to 4-wheel platform truck in seconds, to use throughout records center.

■ **SPECIFICATIONS**

Dimensions are:

21"W x 51"H, Unit has load capacity of 500 lbs. as hand truck and 1,000 lbs. as platform truck, high strength, light weight aluminum. Nose is Die-cast magnesium 18" wide, 7½" deep. 10" pneumatic tires, 5" x 1 ½" casters. All parts are replaceable.

* Additional accessories available.

■ **SHIP WEIGHT**

45 lbs.



HANDLING EQUIPMENT

TRUCKS & CARTS



MAGLINER® HAND TRUCK HT-ML

■ **DESCRIPTION**

Aluminum Hand Truck

■ **USE**

General Purpose hand truck for use throughout records center.

■ **SPECIFICATIONS**

Dimensions are:

17¼"W x 48"H, Unit has load capacity of 500 lbs.

Ergonomically friendly, perfectly balanced and easy to handle. High strength, light weight aluminum.

Straight back frame with basic loop handle with "U" brace for extra load support. Nose is Die-cast magnesium 18" wide, 7½" deep. 10" puncture resistant microcellular foam tires. All parts are replaceable.

* Additional accessories available.

■ **SHIP WEIGHT**

30 lbs.



FOAM TIRES FT-5

■ **DESCRIPTION**

Microcellular Foam Tires

■ **USE**


Can be replaced on the Gemini Sr. or Gemini Jr. hand trucks.

■ **SPECIFICATIONS**

10" puncture resistant microcellular foam tire with semi-precision double-groove ball bearings. Never goes flat, performs like a pneumatic tire but doesn't require air.

■ **SHIP WEIGHT**

5 lbs. (each)

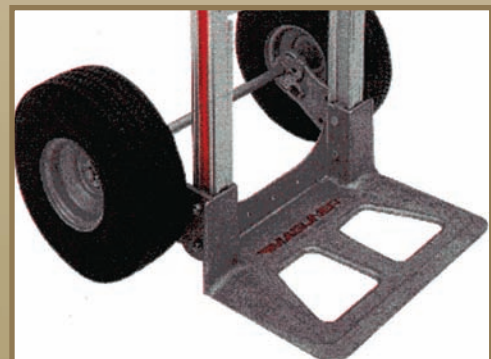

HANDLING EQUIPMENT

TRUCKS & CARTS

WELDED SERVICE CART WSC-66, 76

■ **DESCRIPTION**

Welded Service Cart

■ **USE**

Transportation of boxes or any heavy merchandise throughout records center.

■ **SPECIFICATIONS**

Shelf Dimensions are:

WSC-66 24"W x 36"L 66 lbs.

WSC-76 24"W x 48"L 76 lbs.

Unit has load capacity of 1,600 lbs. all welded, heavy duty, steel. Casters are mold on rubber, (2) swivel (2) rigid. Top lip is 1½", can be assembled up or down (please specify).



RUBBERMAID INDUSTRIAL CART RIC-45, 52

■ **DESCRIPTION**

Rubbermaid Industrial Cart

■ **USE**

Transportation of boxes or any heavy merchandise throughout records center.

■ **SPECIFICATIONS**

Shelf Dimensions are:

RIC-45 20"W x 38"L 45 lbs.

RIC-52 26"W x 44"L 52 lbs.

Unit has load capacity of 500 lbs. Tough polypropylene structural foam construction, won't rust, dent or chip. Casters are 5" non-marking (2) swivel, (2) rigid. Rimless design makes it easy for loading and unloading heavy items and packages.



HANDLING EQUIPMENT

TRUCKS & CARTS

MEDICAL STOCK TRUCK MST2448

■ DESCRIPTION

Open File Medical Stock Truck

■ USE

Retrieval of open file storage and temporary mobile storage.

■ SPECIFICATIONS

Dimensions are:

24"D x 48"W x 52"H, Unit has a load capacity of 2,000 lbs. 3 center shelves with clearance space of 17" between shelves, closed ends and top. Casters are 8" X 2" mold on rubber (2) swivel (2) rigid. 14 gauge shelves, 16 gauge sides and back, gray powder coat finish.

■ SHIP WEIGHT

270 lbs.



SHELF DIVIDERS SD-18, 24, 36

■ DESCRIPTION

Shelf Dividers for X-ray and medical files

■ USE

Special X-ray and medical file dividers
For 5/8" particle board shelving.

■ SPECIFICATIONS

Dimensions are:

SD-18 18"L x 6"W

SD-24 24"L x 6"W

SD-36 36"L x 6"W

■ SHIP WEIGHT

Varies, please call



FACILITY EQUIPMENT

FACILITY EQUIPMENT

STRAPPING MACHINE SM-120

■ **DESCRIPTION**

Semi-Automatic Strapping Machine

■ **USE**

Allows strapping any item with flexibility of all configurations no matter of size or shape.

■ **SPECIFICATIONS**

Dimensions are:

30.71"L x 21.89"W x 29.53"H Can be used with strap widths of 1/4", 3/8", 1/2", or 5/8". Allows tension from 4.4 lbs. to 110 lbs. without scuffing the strap. Includes casters for easy movement and portability. Power is 110V, single phase.

■ **SHIP WEIGHT**

120 lbs.



WORK STATION WS-196

■ **DESCRIPTION**

Basic Work Bench

■ **USE**

Designed for general purpose use anywhere throughout the record center.

■ **SPECIFICATIONS**

Dimensions are:

60"L x 34"W x 34"H

Includes bench with stringer & lower shelf, drawer, riser back and end stops. All steel components. Top is 1 3/4" thick and constructed of 12 gauge steel. Drawer is 9" deep. Riser dimensions: 60"L x 10 1/2"W x 12"H Available in Gray or Putty.

■ **SHIP WEIGHT**

196 lbs.



FACILITY EQUIPMENT

FACILITY EQUIPMENT

SORTING STATION **SS-100, 40, 85, 79**

■ **DESCRIPTION**

Standard Sorting Station

■ **USE**

General purpose for sorting and organizing materials.

■ **SPECIFICATIONS**

Dimensions are:

SS-100 Bench: 68" x 30" x 34"

SS-40 Riser: 68" x 15" x 13"

SS-85 Large Sorter: 68" x 15" x 20"

SS-79 Small Sorter: 68"L x 15" x 17 3/8"

Unit has load capacity of 1,000 lbs. 3/4" thick laminated top is mounted to a four piece steel frame. Legs are 1 1/2" square steel tubing.

* Additional accessories available.

■ **SHIP WEIGHT**

Varies, please call



PACKING STATION **PS-204**

■ **DESCRIPTION**

Basic Packing Station

■ **USE**

General purpose packing station keeps all your packaging supplies organised and easily accessible.

■ **SPECIFICATIONS**

Dimensions are:

Bench: 68" x 33"

Legs adjust 29" x 36"


Document shelf: 64" x 9" x 9 1/2"

Includes carton rack with 6 dividers and T-upright.

* Additional accessories available.

■ **SHIP WEIGHT**

204 lbs.

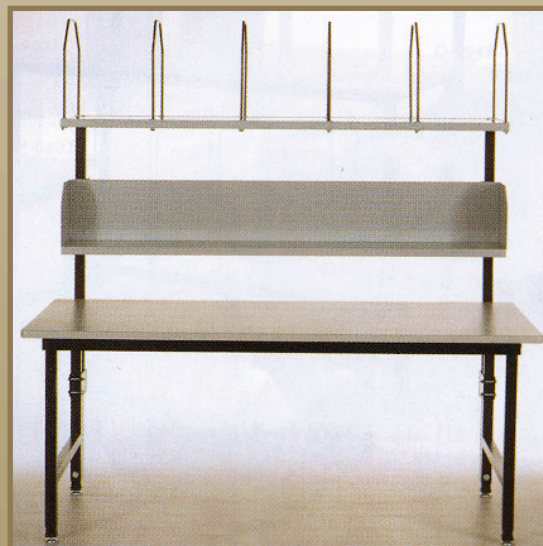

FACILITY EQUIPMENT

FACILITY EQUIPMENT

WEIGHING SCALE - Portable SM-120

■ DESCRIPTION

Portable Bench Scale

■ USE

General purpose scale.

■ SPECIFICATIONS

Dimensions are:

Platform: 12.2" x 11.7", LCD display: 1.0"

Capacity: 150 lbs x 2 lbs or 400 lbs x 5 lbs

Power supply: 6 AA batteries or AC adapter.

All metal construction.

■ SHIP WEIGHT

11 lbs.



Portable

WEIGHING SCALE - Integrated SM125

■ DESCRIPTION

Integrated Bench Scale

■ USE

Bench scale that can be integrated with your computer.

■ SPECIFICATIONS

Dimensions are:

Platform: 12.5" x 14", LCD display: 0.5"

Capacity: 150 lbs. x 0.1 or 0.05

Power supply: standard 3-wire ground. Compatible with most shipping software programs, including UPS Worldship®.

■ SHIP WEIGHT

21 lbs.



Integrated



Platform

WEIGHING SCALE - Platform PPT-885

■ DESCRIPTION

Platform Floor Scale

■ USE

Weighing pallets or other large items.

■ SPECIFICATIONS

Dimensions are: 48" x 48" x 3.1"

Capacity: 5,000 lbs. x 1 lb.

0.19" top deck with safety tread, powder coat finish.

* Additional models available, please call.

■ SHIP WEIGHT

330 lbs

FACILITY EQUIPMENT

FACILITY EQUIPMENT

LOCKERS - 6-Door L-166

■ **DESCRIPTION**

Two Tier, Three Wide – 6 Doors

■ **USE**

Stores employees valuables safely.

■ **SPECIFICATIONS**

Dimensions are:

Overall : 36"W x 18"D x 72"H

Each opening: 12"W x 18"D x 36"H

All lockers have one double-prong and three single prong coat hooks. Padlock attachment is an integral part of the handle-padlock not included.

Available in gray, putty or blue.

■ **SHIP WEIGHT**

166 lbs



LOCKERS - 18-Door L-178

■ **DESCRIPTION**

Six Tier, Three Wide – 18 Doors

■ **USE**

Stores employees valuables safely.

■ **SPECIFICATIONS**

Dimensions are:

Overall: 36"W x 18"D x 72"H

Each opening: 12"W x 18"D x 12"H

Doors are equipped with padlock, hasps with door pulls.

Available in gray, putty or blue.

■ **SHIP WEIGHT**

178 lbs.



FACILITY EQUIPMENT

FACILITY EQUIPMENT

PORTABLE FAN PP18, 22

■ DESCRIPTION

Portable Pedestal Fan

■ USE

Handles a wide range of ventilating, cooling, drying and air-circulating jobs.

■ SPECIFICATIONS

PP18 18" Air throw of 80 feet, H.P. 1/2,
single phase 115V,
2,000 sq. ft. area of coverage.

PP22 22" Air throw of 120 feet, H.P. 1/2,
single phase 115V,
3,000 sq. ft. area of coverage.

■ SHIP WEIGHT

18" – 97 lbs.

22" – 104 lbs.



RACK-MOUNT FAN RM18, 22

■ DESCRIPTION

Rack Mount Fan

■ USE

Handles a wide range of ventilating, cooling, drying and air-circulating jobs. Attaches directly to rack.

■ SPECIFICATIONS

RM18 18" Air throw of 80 feet, H.P. 1/2,
single phase 115V,
2,000 sq. ft. area of coverage.

RM22 22" Air throw of 120 feet, H.P. 1/2,
single phase 115V,
3,000 sq. ft. area of coverage.

■ SHIP WEIGHT

18" – 64 lbs.

22" – 71 lbs.



FACILITY EQUIPMENT

FACILITY EQUIPMENT

PORTABLE RACKS

■ DESCRIPTION

Portable Tier Racks

■ USE



Position assembled racks to form a tier, connected at the four posts.

■ SPECIFICATIONS

Designed to support pallets - 3 to 5 levels high and up to 4,000 lbs. per level. Breaks down for easy storage when not in use, saving valuable floor space for other uses. Comes in a variety of capacities, sizes, colors, and options. *Custom, please call for quote.

■ SHIP WEIGHT

Varies, please call

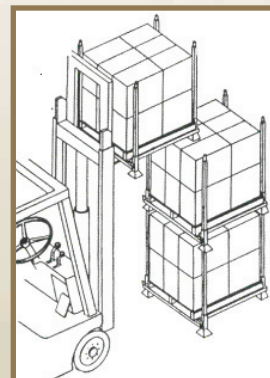

CHUTE MASTERS

■ DESCRIPTION

Chute Master – Spiral Chutes

■ USE

Provides a safe, secure means of lowering your products while utilizing space at an economical cost.

■ SPECIFICATIONS

Constructed of durable fiberglass which has a special gel-coating to provide long wearing, low friction service. The modules are attached to a center pole which is the sole support for the unit. The specially designed fiberglass profile modules control the descending speed of your products. In high humidity situations the self-starting characteristic of the gel-coated fiberglass allows products to flow freely, gently and safely.

* Custom, please call for quote.

■ SHIP WEIGHT

Varies, please call



FACILITY EQUIPMENT

FACILITY EQUIPMENT

WIRE ENCLOSURES

■ **DESCRIPTION**

Steel Wire Security Enclosure

■ **USE**


Provides a secure enclosure that can be easily installed, modified or expanded.

■ **SPECIFICATIONS**

Standard #10 gauge wire
1" x 2" mesh panels, posts have welded baseplates allowing anchoring to the floor. Can be easily installed, taken down, modified or re-arranged by company maintenance people.

■ **SHIP WEIGHT**

Varies, please call.

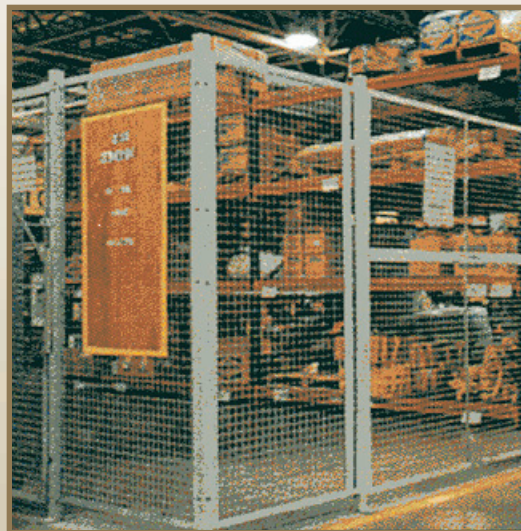

STOCKROOM SHELVING

■ **DESCRIPTION**

Stock Room Shelving

■ **USE**

Strong, sturdy shelving for stock room storage.

■ **SPECIFICATIONS**

Custom, depending on your required specifications.
Please call for custom quote.

■ **SHIP WEIGHT**

Varies, please call.



FACILITY EQUIPMENT

SAFETY EQUIPMENT

PROTECTIVE RAILING

■ DESCRIPTION

High Strength steel protective railing

■ USE

Protects valuable assets or areas from damage throughout records center.

■ SPECIFICATIONS

Rails: Corrugated 10 gauge steel

Columns: 4" x 4" x 1/4" wall


Structural tubing.

Baseplate: 10" x 10" x 5/8" plate.

Single (18") Double (42") Triple (42") rail columns available.

Rail sections available in lengths of 10', 8', 7', 6', 5' and 4'

* Custom, please call for quote.

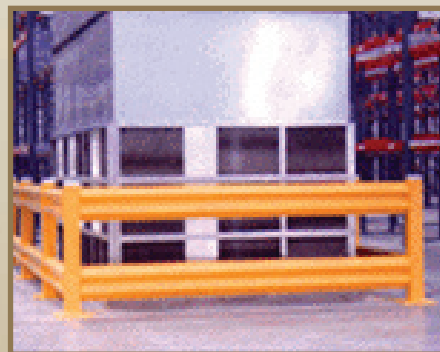

COLUMN PROTECTORS

■ DESCRIPTION

Sentry column and rack protectors

■ USE

Protects columns and racks from damages caused by heavy equipment.

■ SPECIFICATIONS

Fits columns from 4" to 18", squares, rounds and H's.

Footprints from approximately 14" x 38" in diameter.

Product is molded from a semi-flexible and stress-crack resistant plastic. Bright safety yellow, makes them easy to see. UV stabilized plastic prevents fading or discoloration. Chemical-resistant and non-conductive. Built to last in any condition. Easily installed, lightweight, one person can install in seconds.

* Custom, please call for quote.



FACILITY EQUIPMENT

SAFETY EQUIPMENT

SAFETY NETS

■ DESCRIPTION

Safety Net for racks

■ USE

Designed as a barrier wall for loose and stacked goods from falling, ideally suited for flush mount applications.

■ SPECIFICATIONS

An engineered thermoplastic net, or grid, made from high performance polymers to produce the high tensile strength and dimensional stability necessary to protect warehouse goods from falling. Available in a variety of capacities and sizes, please call for quote.

■ SHIP WEIGHT

Varies, please call.



SECURITY GATES

■ DESCRIPTION

Folding Steel Security Gates

■ USE

Protects property from theft and provides control of pedestrian traffic.

■ SPECIFICATIONS

Dimensions are:

8' to 10'W x 6' 6"H (retracted)

Made of heavy duty steel

U-channels riveted back to back using aircraft quality rivets.


Heavy duty vertical 1½" x 1½" angles, and casters.

Galvanized finish. 5 year warranty.

Other sizes available, please call.

■ SHIP WEIGHT

110 lbs.

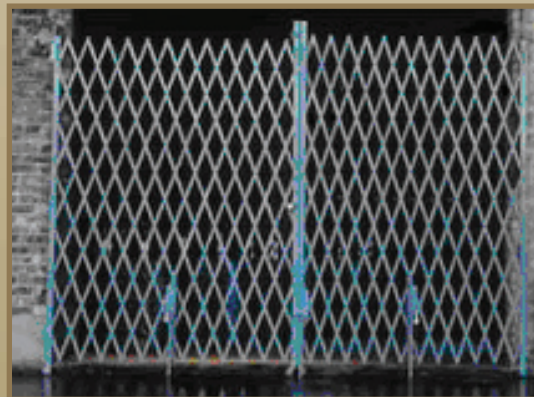

FACILITY EQUIPMENT

DOCK EQUIPMENT

DOCK BOARDS

DB-3

■ **DESCRIPTION**

Aluminum Truck Dockboard

■ **USE**

Provides a stable platform for loading and unloading trailer with a forklift, pallet jack, or hand cart.

■ **SPECIFICATIONS**

3" steel channel side curbs

(4" curbs on all boards 66" or longer)

Steel stops available, 11" apron length standard.

1/16" raised diamond tread plate surface and

an 11° angle. Various models in widths

of 54" to 72", lengths 36" to 96" and 8,000, 10,000, 2,000, and 15,000 pound capacities.

■ **SHIP WEIGHT**

Varies, please call.



DOCK PLATES

DP-11

■ **DESCRIPTION**

Aluminum Truck Loading Plate

■ **USE**

Provides a stable platform for loading and unloading trailer with a pallet jack, or hand cart.

■ **SPECIFICATIONS**

Lightweight aluminum construction.

Optional two loop-handles for easy convenient handling. Tread plate surface for long service life.

Highly visible, yellow "safe-T-lane" painted edges. 11" apron with machine beveled entry and exit edges.

Anchor stops available.

Various models in widths of 30" to 72", lengths 24" to 72" and weight capacities of 1,550 to 6,650 pounds.

■ **SHIP WEIGHT**

Varies, please call



FACILITY EQUIPMENT

DOCK EQUIPMENT

WHEEL RISERS WR-18

■ **DESCRIPTION**

Aluminum Wheel Risers

■ **USE**

Elevate low trucks to dock height.

■ **SPECIFICATIONS**

Dimensions are:

18"W x 48"L x 6"H

Unit has a load capacity of 30,000 lbs. per pair.

Aluminum construction.

Safety treadplate provides positive traction.

Designed to facilitate compliance with OSHA requirements for a 10% maximum grade of ascending or descending loaded fork trucks.

■ **SHIP WEIGHT**

70 lbs. (each)



WHEEL CHOCK WC-985

■ **DESCRIPTION**

Rubber Wheel Chock with eyebolt

■ **USE**

Place under the wheels to prevent rolling.

■ **SPECIFICATIONS**

Dimensions are:

9"W x 8"D x 5¾"H

Economical nylon reinforced molded rubber provides sure grip traction. Rubber resists tearing, abrasions, ozone weathering, etc. Safety engineered to prevent sliding. Complete with cadmium plated eyebolt.

■ **SHIP WEIGHT**

10 lbs. (each)



FACILITY EQUIPMENT

CONVEYORS

FLEX GRAVITY ROLLER FGR-550

■ **DESCRIPTION**

Flexible Gravity Roller Conveyor System

■ **USE**

For aisle to rack, or truck to ground loading and unloading.

■ **SPECIFICATIONS**

Dimensions are:

18"W x 8' to 24'L

Adjustable legs made from heavy duty square tubing, that can adjust conveyor height to 28½" to 41½".

Steel zinc plated rollers, 1.3" diameter.

Unit has load capacity upto 150 lbs. per linear foot.

■ **SHIP WEIGHT**

550 lbs.



FLEX GRAVITY SKATE ROLLER FGSR-530

■ **DESCRIPTION**

Flexible Gravity Skatewheel Conveyor System

■ **USE**

For aisle to rack, or truck to ground loading and unloading.

■ **SPECIFICATIONS**

Dimensions are:

18"W x 6' to 24'L

Adjustable legs made from heavy duty square tubing, that can adjust conveyor height to 28½" to 41½".

Self tracking steel wheels.

Unit has a load capacity of 200 lbs. per linear foot.

■ **SHIP WEIGHT**

530 lbs



FACILITY EQUIPMENT

CONVEYORS

VERTICAL RECIPROCATING WR-18

■ DESCRIPTION

Vertical Reciprocating Conveyor
(FOR MATERIALS ONLY)

■ USE

In any multi-floor or mezzanine application to move materials from level to level.

■ SPECIFICATIONS

Designed and manufactured to meet ANSI/ASME – B20.1 “Safety Standard for Conveyors”

Dimensions are:

Standard Carriage Platform:

5’W x 9’D x 6’ 6”H, the operating sides will be open and the non-operating sides will be sheet metal.

The roof of the carriage platform is constructed of expanded metal.

Load Patterns: “C” or “Z”

Top lifting height: application specific.

Overhead clearance:

7’ (based on standard 6’ 6” load height).

NO OVERHEAD MACHINERY

Lifting speed: 40 fpm (standard)

Motor: 2HP @ 2,200 lbs. capacity
and 5HP @ 4,400 lbs. capacity.

Standard voltage is:

460 volt/3 phase/60Hz.

Unit has load capacity of 2,200 lbs. or 4,400 lbs.

Gates are integrated into the VRC design and set up at the factory.

One (1) each is provided at the two (2) operating levels. Gates are bi-parting swing type, with electro-mechanical interlocks.





NATIONWIDE ARCHIVE SYSTEMS SOLUTIONS



Turn-Key Rack and Shelving Systems

Expert Sales and Engineering Offices in California, Massachusetts and Georgia

Regional Manufacturing Plants for Quick Deliveries and Freight Savings

Nationwide Installation and Project Management

Value-Added Services

- Site Surveys
- Auto CAD Design & Layout
- Structural & Seismic Engineering
- Permitting
- Aggressive Pricing
- New & Used Systems
- On-Line Super Store

Equipment for Records Center

- Archive Storage Systems
- Medical & X-ray Shelving
- Steel Shelving
- Rivet Shelving
- Shelving Mezzanines
- Mobile Aisle Shelving
- Accessory Equipment